

SPECIFICATIONS

1310 nm Superluminescent LED

DL-US31014D-FS

A. PRODUCT DESCRIPTION

The DenseLight DL-CS31014D series is a 1310nm uncooled SLED packaged in TO-56 single mode fiber pigtail. It operates over a wide temperature range from 0 to 65 °C.

For responsive prototyping enquiries please email: sales@denselight.com

B. FEATURES

- Ex-fiber output power of $>150\mu\text{W}$ @ 25 °C
- Center wavelength of 1310nm
- 3dB bandwidth of $>35\text{nm}$
- TO-56 pigtail package
- Single mode fiber output
- Operating temperature range 0 to 65 °C

C. ABSOLUTE MAXIMUM RATINGS


Parameter	Symbol	Condition	Min	Max	Unit
Reverse voltage	V_R	-	-	2	V
Forward voltage	V_F	I_{op}	-	2.5	V
Forward current	I_F	CW	-	150	mA
Case temperature	T_c	I_{op}	0	65	°C
Storage temperature	T_{stg}	Unbiased	-40	85	°C
Storage humidity		-	5	85	%RH
Electro static discharge (ESD)	V_{ESD}	Human body model	-	500	V
Lead soldering temperature	S_{temp}	-	-	260	°C
Lead soldering time	S_{time}	-	-	10	sec

D. SPECIFICATIONS ($T_c = 25\text{ °C}$)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward voltage	V_F	I_{op}	-	-	2	V
Operating current	I_{op}	CW	-	-	100	mA
Optical output power	P_o	I_{op}	150	-	-	μW
Center wavelength	λ_c	I_{op}	1280	1310	1330	nm
3 dB Bandwidth	B_{FWHM}	I_{op}	35	-	-	nm

E. PACKAGE


Part	Description
Package type	TO-56
Fiber:	SMF-28
MFD	9 μ m
Cladding diameter	125 μ m
Coating diameter	245 μ m
Jacket	900 μ m loose tube
Fiber pigtail length	1m
Fiber bending radius	>40mm
Connector	FC/APC
Dimensions	See figure

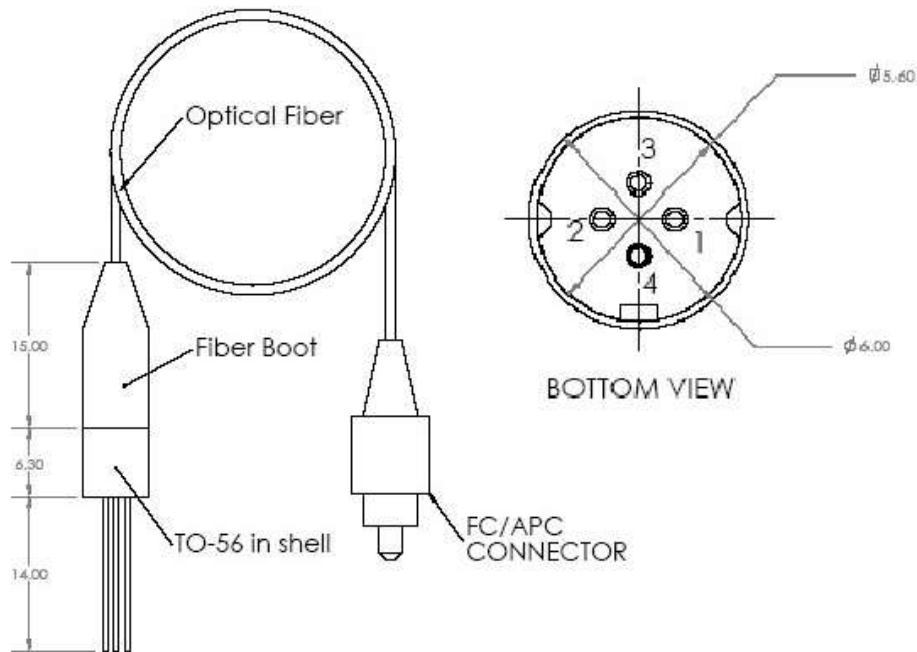


Pin Assignment	Description
1	SLED Anode
2	SLED Cathode
3	NC
4	Case

F. TYPICAL PERFORMANCE CHARACTERISTICS


Operating condition: $T_C = 25\text{ }^\circ\text{C}$

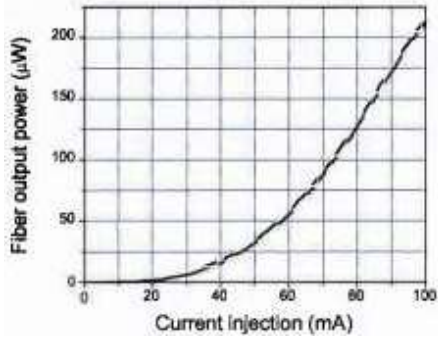

P-I Curve

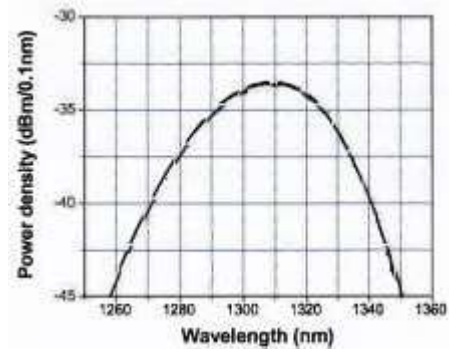


Spontaneous Emission Spectrum

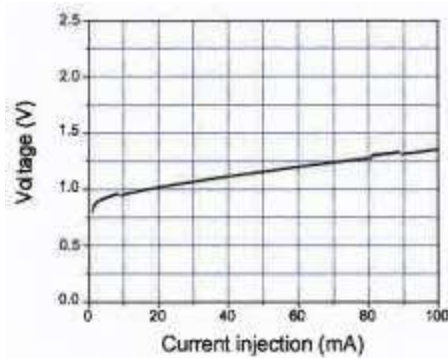

V Curve

I-

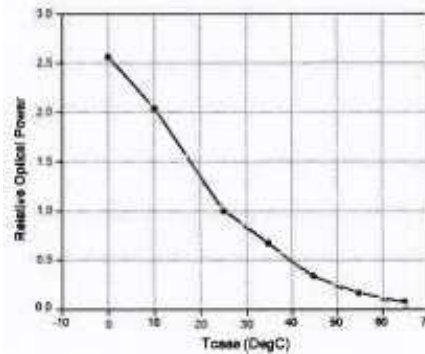

Temperature Dependence of Optical Power

G. DISCLAIMER FOR CUSTOMER SPECIFIC APPLICATIONS

Denselight product is not intended for use other than stated on the application note or as defined in the product specification. The performance of the product should always be tested in the actual application conditions. As our products are used in conditions beyond our control, we cannot assume any liability for damage caused through their use. Users of DenseLight products are solely responsible to thoroughly test and qualify their system and / or application for their intended application and have determined such at their sole discretion. DenseLight cannot assume any liability for the use of our products in conjunctions with other. Customer assumes the sole risk and liability of the product performance other than specified by the product specific data sheet or application notes without DenseLight's specific written consent.